High Power Programmable DC Power Supplies
HPS Series

The HPS Series Programmable DC Power Supplies provide 20 kW of clean output power and high efficiency in a compact 3U form factor. These power supplies are well equipped for ATE system applications requiring a wide output voltage up to 1500 V. Multiple power supplies can be combined in parallel to increase the total output power to 160 kW.

The 5-inch touchscreen offers intuitive control while displaying both set and measured values including simulated internal resistance. The script function enables the power supply to output a sequence of user-defined voltage/current steps based on a set of written commands.

Additionally, built-in protection features including under voltage protection help prevent damage to the power supply and the device under test. Adjustable voltage/current slew rates and configurable output on/off timer functions enhance user control. LabVIEW™ drivers are provided to simplify instrument control from a PC. Output voltage and current can be logged directly to a USB flash drive.

Applications

- Testing photovoltaic components including inverters and battery charge controllers
- Relay and component device testing
- Various applications in aerospace, electric vehicle (EV), and green technology industries
- Manufacturing and production test

Features and benefits

- 5-inch TFT touchscreen display for intuitive control
- High power density, 20 kW in a 3U form factor
- Efficiency up to 94%
- Built-in voltage and current measurement
- Master/slave mode provides up to 160 kW of output power with 8 units connected in parallel
- Galvanically isolated analog control and monitoring interface
- OVP, OCP, OPP, UVP (under voltage protection), and key lock function
- Configurable voltage and current rise time
- Fast transient response time < 3 ms
- Thermostatically-controlled fans help minimize noise
- Simulate the output of photovoltaic arrays
- Remote sense to compensate for voltage drop
- Datalogging directly to a USB flash drive
- Output on/off timer
- RS232 and LAN interfaces
- LabVIEW™ drivers included
- 3-phase 208 VAC or 400 VAC input configurations available*

*See ordering information section on page 5

Model	HPS20K800	HPS20K1500
Max. Output Voltage	800 V	1500 V
Max. Output Current	25 A	13.4 A
Max. Output Power	20 kW	

Technical data subject to change
© B&K Precision Corp. 2024

Operation highlights

Generate custom output sequences (Script function)

The script function provides a simple way to output a sequence of user-defined voltage/current steps. Similar to list mode, this function offers greater flexibility by supporting more complex output curves. The script function is useful for generating custom output sequences in production test and other automated test applications.

Script example

Command	Comment
i 10	Current limit set to 10 A
u 600	Set output voltage to 600 V
RUN	Enable the output
WAIT	Wait for manual trigger
delay 15	15 ms delay
u 550	Set output voltage 550 V
delay 20	20 ms delay
u 500	Set output voltage to 500 V

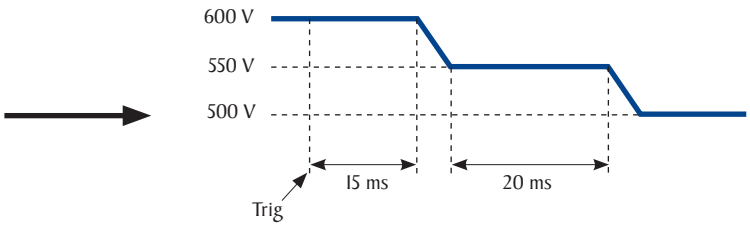

Additional script function capabilities

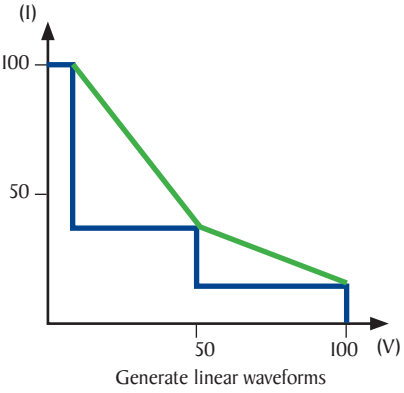

Generate linear waveforms

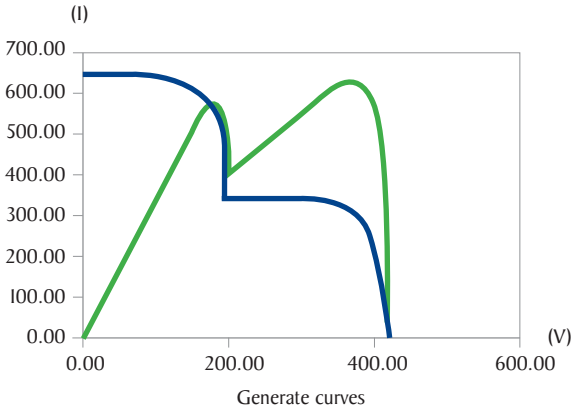

Generate curves

Master/Slave operation

Up to 8 HPS Series power supplies can be connected in parallel delivering 160 kW of total output power.

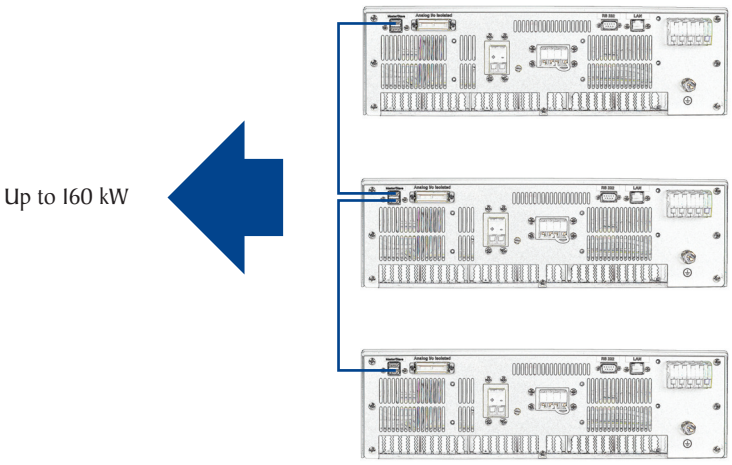

Intuitive front panel operation

The 5-inch touchscreen display is intuitive and easy to navigate. Measured voltage, current, power, and internal resistance values are displayed along with set parameters and operating mode.

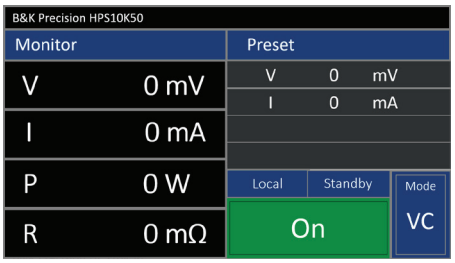

Front panel

Bright 5-inch TFT touchscreen display

Output on/off control
Use the touchscreen or physical button on the front panel to enable/disable the output

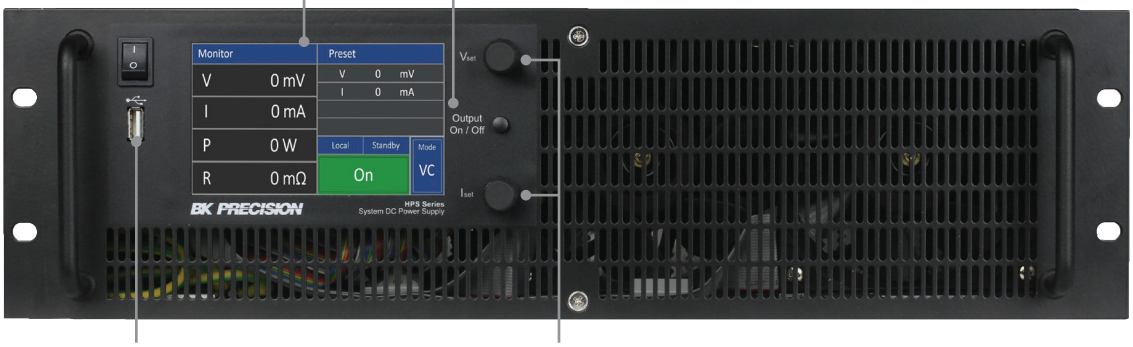

USB host
Log measurement data including voltage and current at a user-defined sampling interval adjustable from 1 s to 100 s directly to an external USB flash drive

Dedicated V & I control knobs
Fine tune voltage and current settings

Rear panel

Master/slave bus interface
Connect multiple instruments in parallel

Output terminal

RS232 interface

LAN interface

AC input terminal
3-phase 208 VAC or 400 VAC input configurations available*

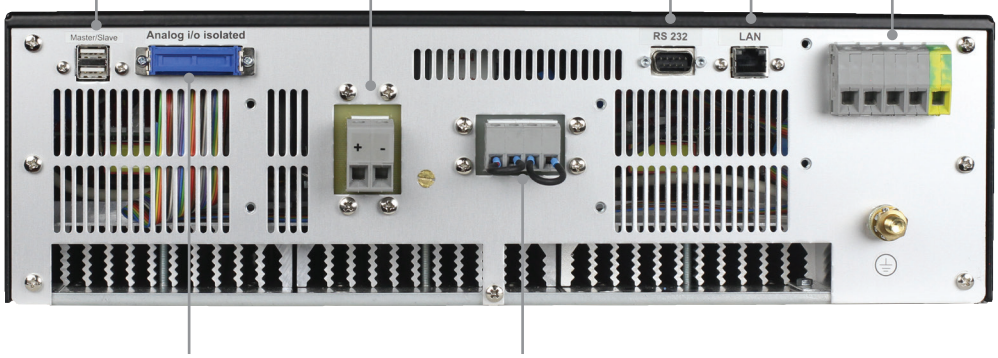

Analog interface
Monitor or control the output using an external voltage source

Remote sense terminal

*See ordering information section on page 5

Specifications

Note: All specifications apply to the unit after a temperature stabilization time of 15 minutes over an ambient temperature range of 23 °C ± 5 °C. Specifications are valid for single unit operation only.

Model		HPS20K800	HPS20K1500
Output Rating			
Output Voltage		0 to 800 V	0 to 1500 V
Output Current		0 to 25 A	0 to 13.4 A
Output Power		20 kW	
Line Regulation			
Voltage		160 mV	300 mV
Current		5 mA	3 mA
Load Regulation			
Voltage		420 mV	770 mV
Current		33 mA	27 mA
Ripple and Noise (20 Hz to 20 MHz)			
Voltage p-p		350 mV	900 mV
Voltage rms		150 mV	200 mV
Current rms[1]		25 mA	12 mA
Readback Resolution			
Voltage Range	20 V to 99.99 V	10 mV	
	100.0 V to 999.9 V	0.1 V	
	1000 V to 1500 V	-	1 V
Current Range	0 A to 9.999 A	1 mA	
	10.00 A to 25 A	10 mA	
Programming Accuracy			
Voltage		≤ 800 mV	≤ 1.5 V
Current		≤ 50 mA	≤ 30 mA
Output Response Time[2]			
Rise Time	Full Load	≤ 40 ms	≤ 6 ms
	No Load	≤ 10 ms	≤ 5 ms
Fall Time	Full Load	≤ 60 ms	≤ 25 ms
	No Load	≤ 10 s	≤ 1 s
208 AC Input			
Nominal Input Voltage		208 VAC	
Input Range		187 to 229 VAC	
Frequency		47 to 63 Hz	
Phase		3 phase	
400 AC Input			
Nominal Input Voltage		400 VAC	
Input Range		360 to 440 VAC	
Frequency		47 to 63 Hz	
Phase		3 phase	
Protection			
OVP	Range	0 to 960 V	0 to 1800 V

(1) When output power > 1.0% of full power.
(2) From 10% to 90% or from 90% to 10% of total voltage excursion.

General			
Remote Sense Compensation		80 V	150 V
Transient Response Time[3]		≤ 3 ms	
Command Response Time[4]		10 ms	
Efficiency[5]		94%	
Power Factor		> 0.7	
Output Terminal Isolation		2000 V	
Inrush Current[6]		76 A	
Leakage Current		< 35 mA	
I/O Interfaces		RS232, LAN, Analog (Galvanically isolated DB25)	
Analog Programming (typical)		Input impedance: 1 MΩ Maximum input voltage 25 V Response time < 10 ms	
Temperature Ratings	Operation	32 °F to 122 °F (0 °C to 50 °C)	
	Storage	-4 °F to 158 °F (-20 °C to 70 °C)	
Operating Humidity		< 80%	
Altitude		< 2000 m	
Environment		Installation category II, pollution degree 2	
Dimensions (W×H×D)		19" x 5.3" x 24.2" (482 x 132.5 x 614.7 mm)	
Weight		82 lbs (37 kg)	
Warranty		3 Years	
Standard Accessories		Test report & certificate of calibration	
Regulatory Compliance			
Safety		Low Voltage Directive (LVD) 2014/35/EU, EN61010-1:2010 + A1:2019	
Electromagnetic Compatibility		EMC Directive 2014/30/EU, EN61326-1:2013	

(3) Time for output voltage to recover within 0.5% ±25 mV of its rated output.
(4) Typical time required for output to begin to change following receipt of command data.
(5) At nominal line voltage and max load.
(6) Applies to rated input voltage. The inrush current only occurs when first connecting to the grid.

Technical Drawings

Units are in mm

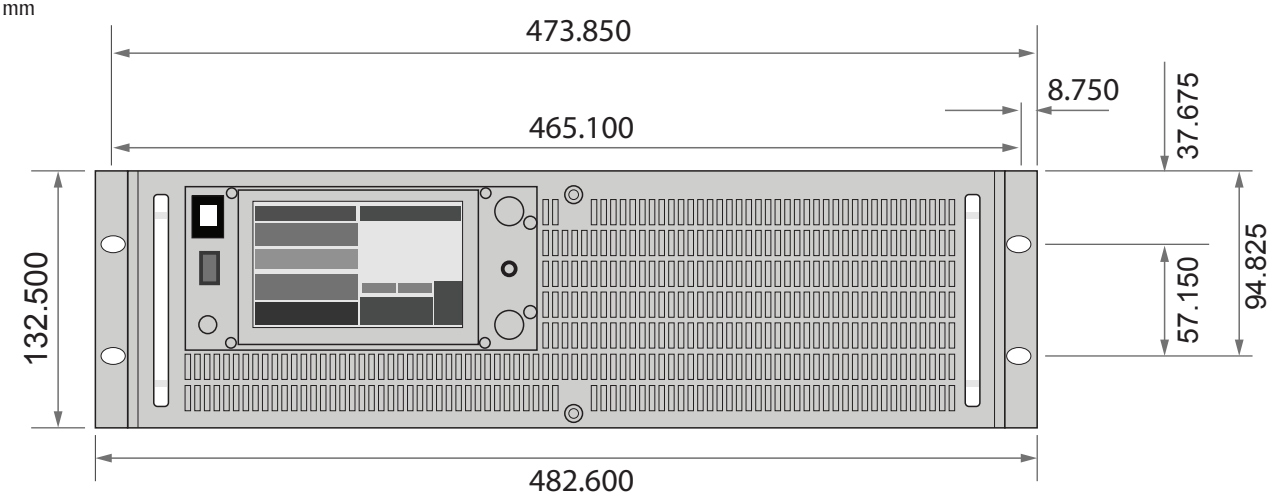

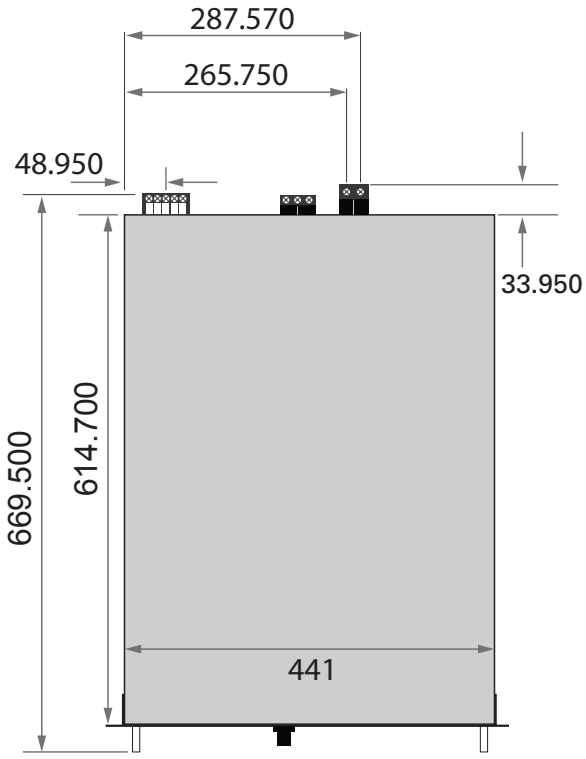

Power cords and termination
Due to various AC line connections and terminations used around the world, the HPS Series requires users to supply their own AC mains connection, based on local laws and codes of the country/region.

Ordering Information

HPS Series

Model	Description
HPS20K800	800 V / 25 A / 20 kW DC Power Supply - 208 VAC Input
HPS20K800-400V	800 V / 25 A / 20 kW DC Power Supply - 400 VAC Input
HPS20KI500	I500 V / I3.4 A / 20 kW DC Power Supply - 208 VAC Input
HPS20KI500-400V	I500 V / I3.4 A / 20 kW DC Power Supply - 400 VAC Input

About B&K Precision

For more than 70 years, B&K Precision has provided reliable and value-priced test and measurement instruments worldwide.

Our headquarters in Yorba Linda, California houses our administrative and executive functions as well as sales and marketing, design, service, and repair. Our European customers are most familiar with B&K through our French subsidiary, Sefram. Engineers in Asia know us through our B+K Precision Taiwan operation. The independent service centers in Singapore and Brasil service customers in Singapore, Malaysia, Vietnam, Indonesia and South America, respectively.

B&K Precision group member Independent service center Service center location

Quality Management System

B&K Precision Corporation is an ISO9001 registered company employing traceable quality management practices for all processes including product development, service, and calibration.

ISO9001:2015

Certification body NSF-ISR
Certificate number 6Z241-IS8

NSF-ISR
Registered to ISO 9001

Video Library

View product overviews, demonstrations, and application videos in English, Spanish and Portuguese.

http://www.youtube.com/user/BKPrecisionVideos

Product Applications

Browse all of our supported product and mobile applications.

http://bkprecision.com/product-applications

TTid.co.uk
THURLBY THANDAR
instrument distribution

Thurlby Thandar Instrument Distribution
Glebe Road, Huntingdon, PE29 7DR, UK
+44 (0)1480 412 451
sales@ttid.co.uk
www.ttid.co.uk